

Table of Contents

Section 11	
Inspection and Evaluation of Waterways		
11.1	Waterway Elements	11.1.1
11.1.1	Introduction.....	11.1.1
11.1.2	Properties Affecting Waterways	11.1.2
11.1.3	Purpose of Waterway Inspections.....	11.1.3
	Identify Critical Damage	11.1.3
	Record Existing Channel Conditions	11.1.3
	Monitor Channel Changes.....	11.1.3
11.1.4	Channel Characteristics.....	11.1.3
	Elements of a Channel.....	11.1.3
	Types of Channels	11.1.4
	Meandering Rivers	11.1.4
	Braided Rivers.....	11.1.5
	Straight Rivers.....	11.1.5
	Steep Mountain Streams.....	11.1.6
11.1.5	Floodplain Characteristics.....	11.1.6
11.1.6	Hydraulic Opening Characteristics	11.1.7
11.1.7	Hydraulic Control Structures Characteristics.....	11.1.8

Section 11

Inspection and Evaluation of Waterways

Topic 11.1 Waterway Elements

11.1.1

Introduction

Rivers are the most dynamic geomorphic system that engineers must cope with in the design and maintenance of bridges. The geomorphic features of the river can change dramatically with time. During major floods, significant changes can occur in a short period of time. While rivers are dynamic, bridges do not usually move, other than in keeping with planned structural deflections resulting from anticipated static and dynamic loading of the structure.

There are several ways in which channels can change and thereby jeopardize the stability and safety of bridges. The channel bed can scour (degrade) so that bed elevations become lower, undermining the foundation of the piers and abutments. Deposition of sediment on the channel bed (aggradation) can reduce conveyance capacity through the bridge opening. Flood waters are then forced around the bridge, attacking roadway approaches, channel banks, and flood plains. Another consequence of aggradation is that the river stage may be increased to where it exerts lateral thrust and lift on the deck and girders of the bridge. The other primary way in which bridges can be adversely affected by a waterway is through bank erosion or avulsion, causing the channel to shift laterally. These phenomena of aggradation, degradation or scour, bank erosion, and lateral migration can be a result of natural or induced causes and can adversely affect the bridge (see Figure 11.1.1). See Topic 11.2 for detailed descriptions of waterway deficiencies.

Of all the bridges in the National Bridge Inventory (NBI), approximately 86% are built over waterways. Bridge inspectors need to understand the relationship between the bridge and waterway elements. This understanding involves being able to recognize and identify the streambed, embankments, floodplain, and stream flow so that an accurate assessment and record of the present condition of the bridge and waterway can be determined.



Figure 11.1.1 Pier Foundation Failure

11.1.2

Properties Affecting Waterways

Safety is a major concern in the inspection of bridges over active waterways. Various properties can affect waterways and structures.

- The physical characteristics of the bridge and waterway, including streambed material.
- The geomorphic history of the waterway (history of changes in the location, shape, and elevation of the channel).
- The hydraulic forces imposed on the bridge by the waterway.
- Changes in the river channel or flow due to development projects (such as dams, diversions, and channel stabilization) or natural phenomena.
- The physical interaction between the abutments, piers, and footings supporting the bridge and the impact of hydraulic conditions.
- The condition of hydraulic control structures that have been utilized to help protect the bridge and adjacent channel.
- Changes in the sediment balance in the stream due to nearby streambed stream gravel mining or landslides.

11.1.3

Purpose of Waterway Inspections

There are three major purposes for conducting waterway inspections.

- Identify critical damage
- Record existing channel conditions
- Monitor channel changes

Identify Critical Damage

Waterway inspections are needed to identify conditions that cause structural collapse. Deficient piling along with damage or deterioration to foundation members can only be detected during a waterway inspection. Entering the water and probing around the foundations is necessary to detect loss of foundation support.

Record Existing Channel Conditions

Waterway inspections are conducted to create a record of the existing channel conditions adjacent to the bridge. Conditions such as channel opening width, depth at substructure elements, channel cross-section elevations, water flow velocity, and channel constriction and skew should be noted and compared to previously recorded conditions.

Accessing the waterway to measure and record channel conditions may be restricted by several factors including channel width and depth, flow velocity, or pollution. These factors may require the bridge inspector to return to the site during a period of low flow. Alternatively the inspector may need to consider using an alternate means of waterway access, such as a boat, or an alternative inspection technique, such as underwater diving inspection.

Monitor Channel Changes

Current waterway inspection data should be compared to previous inspection data in order to identify channel changes. This “tracking” of channel change over time is an important step in ensuring the safety of the bridge. Over time, vertical changes, due to either degradation or aggradation processes, or horizontal alignment changes, due to lateral migration of the channel, could result in foundation undermining, bridge overtopping, or even collapse of the structure. If major changes are found, a formal scour analysis of the site, involving a multi-disciplinary team of engineers, may be needed to estimate floodwater elevations, velocities, angle of attack, and potential scour depths. Potential threats to bridge members caused by channel changes can thus be dealt with before damage actually occurs. See Topic 11.2 for the inspection and evaluation of waterways.

11.1.4

Channel Characteristics

The channel is the well-defined depression that contains and guides stream flow during normal flow conditions (see Figure 11.1.2).

Elements of a Channel

- Streambed - the bottom or floor of the channel. The lowest elevation of the streambed is the “thalweg” elevation.
- Embankments - the sloped sides of the channel, which extend from the streambed to the surrounding ground elevation (floodplain).
- Streamflow - the water, suspended particles, chemicals, and any debris moving through the channel.

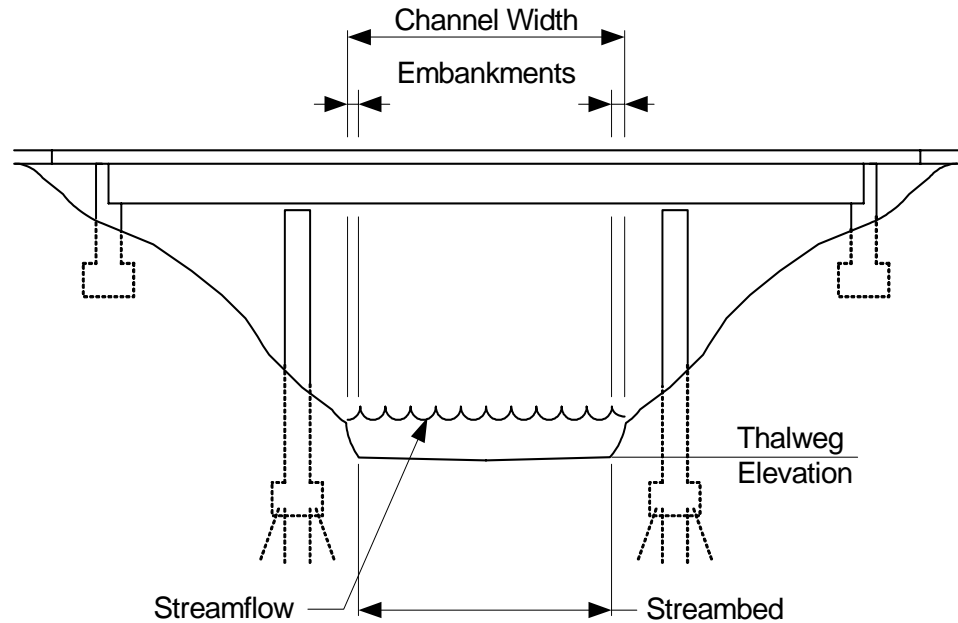


Figure 11.1.2 Typical Waterway Cross Section Showing Well Defined Channel Depression

Types of Channels

Knowledge of the type and profile of a waterway or river channel is essential to understand the hydraulics of the channel and its potential for change. The type of river may dictate certain tendencies or responses that may be more adverse than others. To aid in this understanding, various key river classes are briefly explained. Rivers can be broadly classified into four categories:

- Meandering rivers
- Braided rivers
- Straight rivers
- Steep mountain streams

Meandering Rivers

Meandering rivers consist of a series of bends connected by crossings. In general, pools exist in the bends. The dimensions of these pools vary with the size of the river, flow conditions, radius of the curvature of the bends, and type of bed and bank material. Such rivers are fairly predictable and experience relatively slow velocities. They change at a relatively slow rate and in a predictable manner, except during catastrophic flood events. Figure 11.1.3 illustrates the major characteristics of a meandering river.

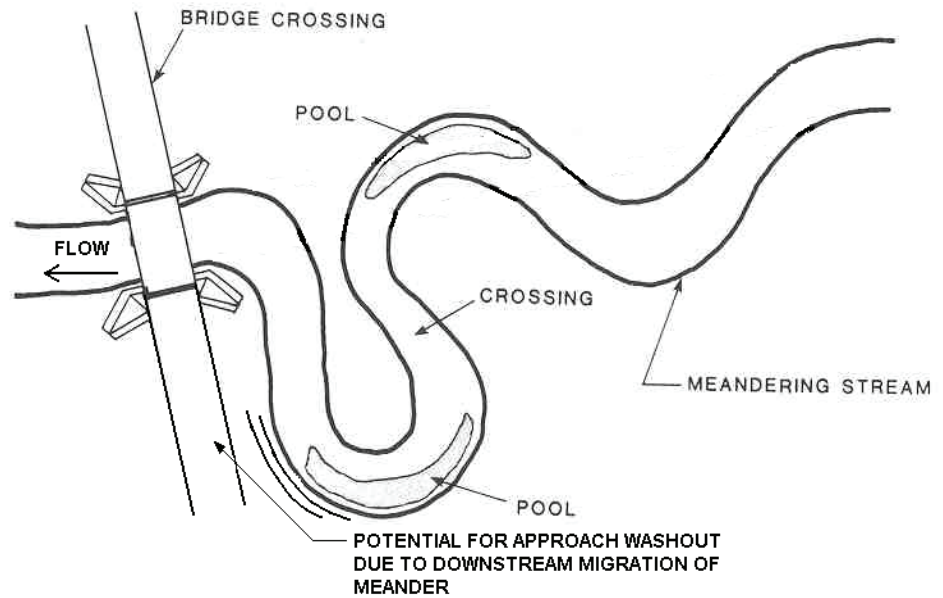


Figure 11.1.3 Meandering River

Braided Rivers

Braided rivers consist of multiple channels that are intertwined in braided form. At flood stages, the appearance of braiding is less noticeable. The bars dividing the multiple channels may become submerged, and the river will appear to be relatively straight. Braided rivers have steeper slopes and experience higher stream flow velocities which may cause larger scour or undermining problems.

Braided rivers can change rapidly, causing different velocity distributions, partial blockages of portions of the waterway beneath bridges, and larger quantities of debris that can be a hazard to bridges and cause accelerated scour. Figure 11.1.4 illustrates the plan view of typical rivers, including meandering, straight, and braided. This figure also relates form of river to channel type based on sediment load and relative stability of river type.

Straight Rivers

Straight rivers are something of an anomaly. Most straight rivers are in a transition between meandering and braided types. In straight rivers, any development that would flatten the gradient would accelerate change from a straight system to a meandering system. Conversely, if the gradient were increased, the channel may become braided. Therefore, in order to maintain the straight alignment over a normal range of hydrologic conditions, it may become necessary to utilize channel hydraulic control measures. The characteristics of straight rivers are identified in Figure 11.1.4.

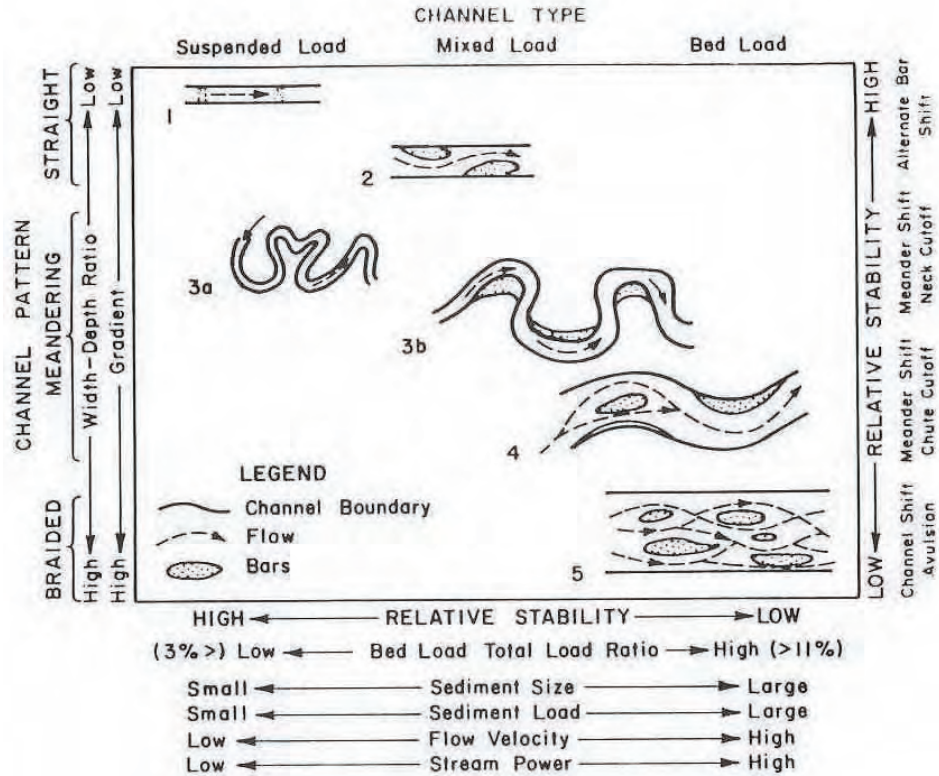


Figure 11.1.4 Plan View of Rivers

Steep Mountain Streams

Steep mountain streams are controlled by geologic formations, rock falls, and waterfalls. They experience very small changes in either plan form or profile when subjected to the normal range of discharges. The bed material of such river systems can consist of gravel, cobbles, boulders, or some mixture of these different sizes. Even though these rivers are relatively stable, they can experience significant velocity and flow changes during episodic flood events.

11.1.5 Floodplain Characteristics

The floodplain is the overbank area outside the channel that carries flood flows in excess of channel capacity (see Figure 11.1.5). It is common to find bridges built within the floodplain. For many structures, the floodplain is quite large, as compared to the channel. Observations made during periods of high water can help the inspector identify the floodplain.

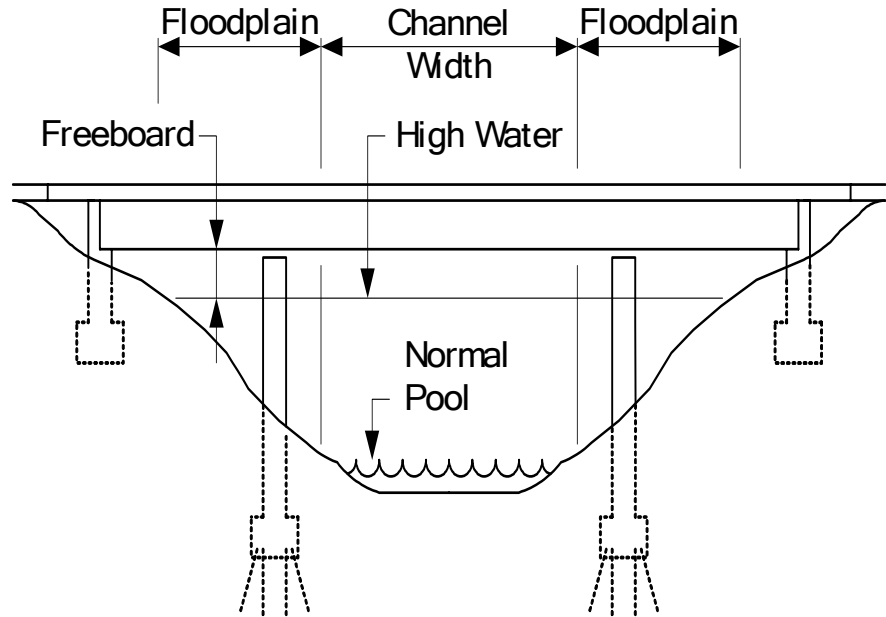


Figure 11.1.5 Typical Floodplain

11.1.6
Hydraulic
Opening
Characteristics

The hydraulic opening is the entire area beneath the bridge which is available to pass flood flows (see Figure 11.1.6). The bottom of the superstructure, the two bridge abutments, and the streambed or ground elevation binds the hydraulic, or waterway, opening. For multiple spans, intermediate supports such as piers or bents restrict the hydraulic or bridge waterway opening.

A common term, freeboard, is used to describe the distance from the bottom of the superstructure to the top of the water surface at a specific reference point (see Figure 11.1.5). Measurements of freeboard can fluctuate due to the flow rate in the waterway and the elevation of the streambed and floodplain. This measurement, in conjunction with average water depth, enables bridge inspectors to detect sudden or drastic changes in the water elevation from inspection to inspection by comparing freeboard measurements from past inspections. The term design freeboard is the expected freeboard at design flood flow.

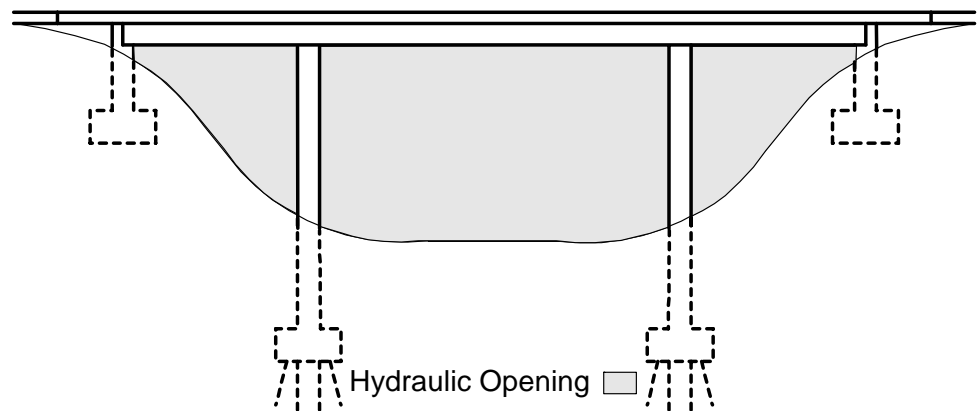


Figure 11.1.6 Hydraulic Waterway Opening

11.1.7

Hydraulic Control Structures Characteristics

Hydraulic control structures are often utilized to provide protection for bridges against lateral migration of the channel and against high velocity flows and scour. A hydraulic control structure is a man-made or man-placed device designed to direct stream flow and protect against lateral migration or undermining. These flow control structures may be utilized either at the bridge, upstream from the bridge, or downstream from the bridge. Control structures are designed by hydraulic and geotechnical engineers and are installed to redirect stream flow and flood flows within the watercourse and through the bridge waterway opening. Some of the more common hydraulic control structures include:

- Riprap
- Spurs
- Guidebanks
- Gabions
- Slope stabilization methods
- Channel lining
- Footing aprons

Riprap consists of properly sized and graded rock that is either natural or manmade, placed adjacent to abutments, piers, or along embankments (see Figure 11.1.7). Riprap should be protected against subsurface erosion by filters formed either of properly graded sand/gravel or of synthetic fabrics developed and utilized to replace the natural sand/gravel filter system. It must be placed on an adequately flat slope to be able to resist the forces of the flowing water. This generally requires placement of the riprap on side-slopes that range between 1.5 or 3.0 horizontal to 1 vertical (1.5H:1V to 3H:1V), depending upon the design criteria. Flatter side-slopes of such as 3H:1V are preferable. Proper design and placement of riprap is essential. Inappropriate installations can aggravate or cause the conditions they were intended to correct or prevent.

Spurs are devices designed to protect as well as redirect stream flow (see Figure 11.1.8). Common applications occur on meandering rivers. The spurs are placed at the outside of the meandering bends to redirect the flow and minimize lateral stream migration.

Guidebanks are constructed to redirect flood flows smoothly through the bridge waterway opening without endangering end substructure units from scour (see Figure 11.1.9). Scour hole formation occurs at the ends of the guidebanks rather than at the structure.

Gabions consist of rectangular rock-filled wire mesh baskets anchored together and generally anchored to the surface which they are designed to protect, such as embankments and substructure footings (see Figure 11.1.10). Gabions may be placed on steeper slopes than riprap or may even be stacked vertically, depending upon the design procedure and site conditions.

Slope stabilization methods consist of the placement of geotextiles, wire mesh, or plantings on the existing channel embankments (see Figure 11.1.11). It is anticipated the various stabilization methods will fill with sediment and help

sustain plant growth. The roots from the plants contribute to stabilize the embankment or flood plane.

Channel lining is normally a concrete or bituminous pavement on the channel embankment and sometimes extends across the streambed. Channel linings also may be revetment mats or some other form of bed armoring (see Figure 11.1.12). A typical revetment mat is formed by interlocking precast concrete blocks placed on a geotextile fabric. The interlocking matrix allows for use over varying land contours and grades.

Footing aprons are protective layers of material surrounding the footing of a substructure unit. Footing aprons usually consist of cast-in-place concrete (see Figure 11.1.13). Footing aprons protect footings from undermining. The aprons are not a structural element of the abutment or pier footings.



Figure 11.1.7 Crushed Stone Riprap



Figure 11.1.8 Spurs Constructed on Mackinaw River (Illinois Route 121)



Figure 11.1.9 Guidebanks Constructed on Kikapoo Creek Near Peoria, Illinois



Figure 11.1.10 Gabion Basket Serving as Slope Protection



Figure 11.1.11 Wire Mesh and Grass Slope Stabilization



Figure 11.1.12 Concrete Revetment Mat (Photo Courtesy of CSI Geosynthetics)

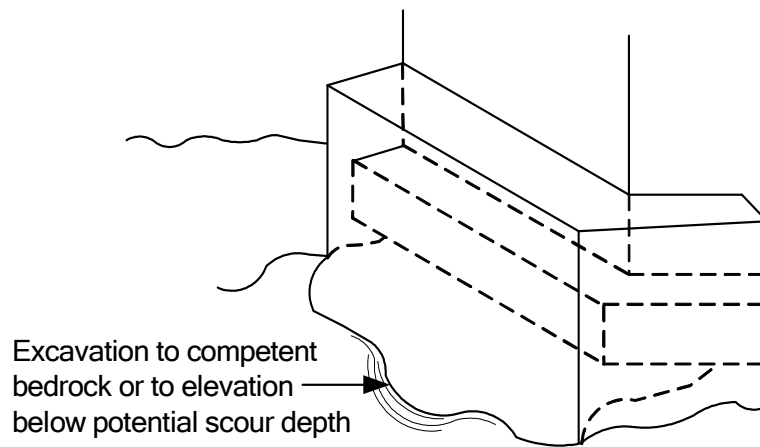


Figure 11.1.13 Concrete Footing Apron to Protect a Spread Footing from Undermining

Table of Contents

Section 11	
Inspection and Evaluation of Waterways		
11.2	Inspection of Waterways.....	11.2.1
11.2.1	Introduction.....	11.2.1
11.2.2	Waterway Performance Factors.....	11.2.1
	Waterway Alignment.....	11.2.1
	Streamflow Velocity.....	11.2.1
	Hydraulic Opening.....	11.2.2
	Streambed Material.....	11.2.3
	Substructure Shape.....	11.2.3
	Foundation Type.....	11.2.3
11.2.3	Waterway Deficiencies.....	11.2.3
	Scour.....	11.2.3
	General Scour.....	11.2.5
	Contraction Scour.....	11.2.6
	Local Scour.....	11.2.10
	Lateral Stream Migration.....	11.2.14
11.2.4	Effects of Waterway Deficiencies.....	11.2.16
	Material Defects.....	11.2.16
	Bridge Damage.....	11.2.16
	Undermining.....	11.2.16
	Settlement.....	11.2.17
	Failure.....	11.2.18
11.2.5	Inspection Preparation.....	11.2.18
	Information Required.....	11.2.18
	Inspection Requirements.....	11.2.19
	Equipment.....	11.2.19
	Special Considerations.....	11.2.21

11.2.6	Inspection Procedures and Locations.....	11.2.22
	Visual.....	11.2.22
	Probing	11.2.22
	Measure/Document.....	11.2.22
	Channel Under the Bridge.....	11.2.23
	Substructure	11.2.23
	Superstructure	11.2.25
	Channel Protection and Scour Measures	11.2.26
	Waterway Area	11.2.28
	Upstream and Downstream Channel.....	11.2.29
	Banks	11.2.29
	Main Channel.....	11.2.30
	Floodplain	11.2.32
	Other Features.....	11.2.33
11.2.7	Evaluation	11.2.34
	Scour Potential Assessment.....	11.2.34
	Purpose and Objective	11.2.34
	Recognition of Scour Potential	11.2.35
	Waterway	11.2.35
	Substructure	11.2.38
	Superstructure	11.2.40
	NBI Rating Guidelines	11.2.41
	Scour Evaluation	11.2.41
	Substructure (Item 60).....	11.2.41
	Channel and Channel Protection (Item 61).....	11.2.41
	Waterway Adequacy (Item 71).....	11.2.41
	Scour Critical Bridges (Item 113).....	11.2.41
11.2.8	Culvert Waterway	11.2.44
	Waterway.....	11.2.44
	General.....	11.2.44
	Stream Channel – What to Look for During Inspection.....	11.2.44
	Waterway Adequacy – What to Look for During Inspection.....	11.2.46

Topic 11.2 Inspection of Waterways

11.2.1

Introduction

The bridge inspector must be able to correctly identify and assess waterway deficiencies when performing a bridge waterway inspection. Accurate bridge waterway inspections are vital for the safety of the motoring public. For this to happen, the bridge inspector should have a thorough understanding of the different types of waterway elements and deficiencies, as well as the various inspection techniques. See Topic 11.1 for detailed descriptions of various waterway elements.

Waterway deficiencies are properties of the waterway or substructure members that work to act negatively on the structural integrity of the bridge. They are mostly interrelated and when a change in one of these properties occurs, others are also affected.

11.2.2

Waterway Performance Factors

Waterway Alignment

In general, bridges are designed so that the flow passes through the waterway parallel to the axes of the abutments and the piers. If the path of flow shifts in direction as a result of continued lateral movement so that it approaches the abutments and the piers at a significant skew angle, the capacity of the waterway can be reduced. More significantly, local scour will be increased and may lead to the failure of the structure. This depends upon the original design conditions and the degree of change resulting in misalignment in the flow with the critical elements supporting the structure. Any change in direction of the approach of the flow to the bridge and any change in the angle at which the flow hits or impinges on the abutments and piers should be carefully noted. Observations of local change in flow directions and surveys of changes in bed and bank elevations must also be made. Evaluation of aerial photographs over time is extremely useful in assessing changes in waterway alignment. All of this information may be utilized to rate the severity of increasing misalignment in the flow on bridge safety.

Example of channel misalignment: If the approaching flow impinges on rectangular piers at an angle of 45 degrees versus flowing parallel to the axis of the piers, the depth of scour may be increased by a factor of two or more. The actual factor of increase depends upon the characteristics of the bed material, the pier type, and the duration of the flood.

For bridges spanning over wide floodplains, the approach angle of the low flow channel may not be significant. In these cases it is the alignment of the floodplain flow during the larger floods that will determine the magnitude of local scour.

Streamflow Velocity

Streamflow velocity is a major factor in the rate and depth of scour. During flood events, the streamflow velocity is increased, which produces accelerated scour rates and depths. At high streamflow velocities, bridge foundations have the greatest chance to become undermined (see Figure 11.2.1).



Figure 11.2.1 Flood Flow Around a Pier Showing Streamflow Velocity

The streamflow velocity depends on many variables. One of these variables is the stream grade. A steep stream grade will produce high streamflow velocities, while a flat stream grade produces low streamflow velocities. Other variables that affect the streamflow velocity include the waterway alignment, the hydraulic opening, any natural or man-made changes to the stream, flooding, etc.

Hydraulic Opening

It is necessary to consider the adequacy of the hydraulic opening (the cross-sectional area under the bridge) to convey anticipated flows, including the design flood, without damage to the bridge. It is essential to maintain a bridge inspection file comparing original conditions in the waterway at the time the bridge was constructed to changes in the cross-sectional area of the channel under the bridge over time.

The primary method of assessing loss of cross-sectional area of the hydraulic opening is to determine channel bed elevation changes. This can be determined by a periodic survey of the channel bed or by taking soundings from the bridge. Typically, a number of survey or sounding points spaced across the bridge opening are established to determine changes in cross-sectional area. The lateral location of these surveyed points should be noted so that as subsequent inspections are conducted, the survey points can be repeated to maintain consistency. Photographs from key locations can be used to document debris and vegetation that can block the bridge opening.

Stream gages in the vicinity of the bridge may be useful in evaluating the adequacy of the waterway in relationship to changing hydraulic conditions. For example, stage-discharge curves based on discharge measurements by the United States Geological Survey (USGS) or other agencies and shifts in rating curves may indicate changes in channel bed elevation and cross section.

Streambed Material	The size, gradation, cohesion, and configuration of the streambed material can affect scour rates. The size of the streambed material has little effect on the depth of scour, but can affect the amount of time needed for this depth to be attained. Cohesive streambed materials that are fine usually have the same ultimate depth of scour as sand streambeds. The difference is that the cohesive streambeds take a longer period to reach this ultimate scour depth. For these reasons, the streambed type is important and should be correctly evaluated by the bridge inspector. Streambed rates of scour for different types of material are described later in this topic.
Substructure Shape	Substructure members on old bridges were not necessarily designed to withstand the effects of scour. Wide piers and piers skewed to the flow of the stream can contribute to an increase the depth of scour. Due to increased awareness of bridge waterway scour, recent substructure members have been designed to allow the stream to pass through with as little resistance as possible. Many newer piers have rounded or pointed noses, which can decrease the scour depth by up to 20%.
Foundation Type	Footings that are undermined, but founded on piles are not as critical as spread footings that are undermined. The inspector should determine the substructure foundation type, in order to properly evaluate the substructure and the waterway. The foundation type may often be determined from design and/or construction drawings. In some older bridges, the foundation type is not known. In this case, advanced inspection techniques by a trained professional may be required to verify the foundation type.

11.2.3

Waterway Deficiencies

Scour The most common bridge waterway deficiency is scour, which may adversely impact bridge piers and abutments. Scour is the removal of material from the streambed or embankment as a result of the erosive action of streamflow.

Degradation and aggradation are long-term streambed elevation changes. Degradation is the gradual and even lowering of the streambed elevation due to a deficiency in sediment load available for transport via the stream (see Figure 11.2.2). Aggradation is the gradual and even rise in streambed elevation from deposition or buildup of streambed material, due to an overabundance of sediment load available for transport via the stream. (see Figure 11.2.3).



Figure 11.2.2 Streambed Degradation



Figure 11.2.3 Streambed Aggradation

The rate of scour will vary for different streambed materials, and for different streamflow rates. For a given streamflow rate, a streambed material will scour to a maximum depth in a given time. The following are examples for different types of streambeds and their corresponding scour rate:

- Dense granite: centuries
- Limestone: years
- Glacial tills, sandstone and shale: months
- Cohesive soils (clay): days

- Sand and gravel: hours

There are four forms of scour that must be considered in evaluating the safety of bridges:

- General scour
- Contraction scour
- Local scour
- Lateral stream migration

General Scour

General scour can occur in a short time with the right conditions. General scour or degradation scour would occur whether or not there was a bridge crossing or constriction in the stream. General scour degrades the bed along some considerable length of the river (see Figure 11.2.4).

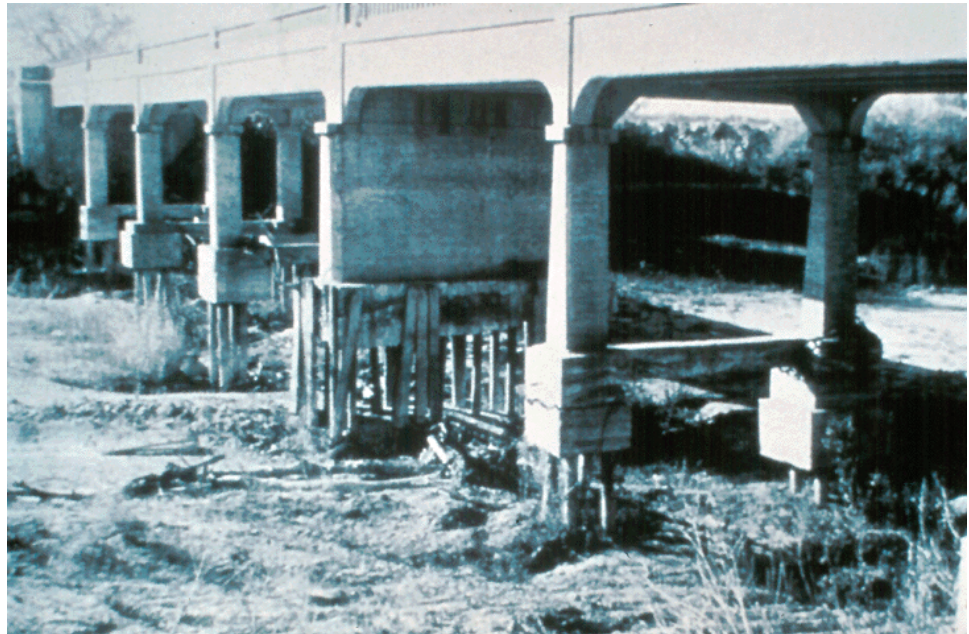


Figure 11.2.4 General Scour

General scour may be a result of the natural erosion and downcutting process that rivers experience through the years. This scour type may be accelerated by natural cutoffs in a meandering river, which steepens the channel gradient, increasing both the velocity of flow and hence scour. General scour may also be accelerated by various types of development or river modification, such as:

- Upstream dam construction
- Dredging
- Straightening or narrowing of the river channel

Changes in downstream elevation, such as at the confluence with another river which is undergoing scour of its own, can cause general scour in the upstream river. Since general scour involves degradation of the channel bed along some considerable distance of channel, major facilities are sometimes used to control

scour. These facilities can include a series of drop structures (small dam-like structures) or other scour protection of the riverbed. Presence of such structures may be indicative that the channel is experiencing scour.

Factors that may cause changes in general scour include:

- Water resources development, such as upstream diversions and upstream dams
- Changes in channel alignment or dimensions
- Urbanization of the watershed (conversion of a more natural or agricultural area to a city)
- Other land use changes

These changing conditions may cause aggradation, loss of waterway cross section, or general scour. This may reduce the degree of safety experienced by the abutments and the piers, because of the changed hydraulic conditions and the changed channel geometry. In this case, it is essential to refer to the bridge inspection file and study historical changes that have occurred in the bed elevation through the waterway. If possible, these changes should be related to specific causes to assess the present safety of the bridge. These changes also provide insight as to future conditions that may be imposed by changed flow conditions, watershed development, or other conditions affecting the safety of the bridge.

Contraction Scour

Contraction scour results from the acceleration of flow due to a natural contraction, a bridge contraction, or both (see Figures 11.2.5 and 11.2.6). A bridge length may be shortened to reduce the initial cost of the superstructure. However, this shortened bridge results in a smaller hydraulic opening which can lead to contraction scour (see Figure 11.2.7).

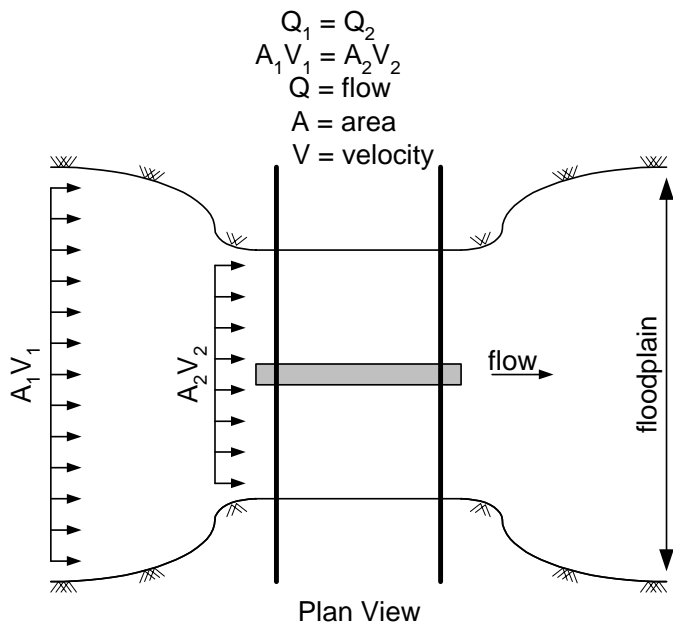


Figure 11.2.5 Severe Contraction Scour



Figure 11.2.6 Severe Contraction Scour at a Multiple-Span Bridge Site



Figure 11.2.7 Large number of Piers Combine to Reduce the Hydraulic Opening

Some common causes that can lead to contraction scour include:

- A natural stream constriction such as hard rock on embankment slopes.
- Excessive number of piers in the waterway (see Figure 11.2.7)
- Heavy vegetation in the waterway or floodplain (see Figure 11.2.8).
- Bridge roadway approach embankments built in the floodplain constricting the waterway opening. The overbank area of the floodplain is restricted by the bridge approach embankments extending partially across the floodplain (see Figure 11.2.5).

SECTION 11: Inspection and Evaluation of Waterways
TOPIC 11.2: Inspection of Waterways

- Formation of sediment deposits within the waterway along the inside radius of curved waterways (sandbars), and along embankments that constrict or reduce the available waterway opening (see Figure 11.2.9).
- Ice formation or ice jams that temporarily reduce the waterway opening and produce contraction (see Figure 11.2.10).
- Debris buildup, which often reduces the waterway opening (see Figure 11.2.11).

The effects of contraction scour can be very severe.



Figure 11.2.8 Vegetation Constricting the Waterway



Figure 11.2.9 Sediment Deposits Within the Waterway Opening



Figure 11.2.10 Ice in Stream Resulting in Possible Contraction Scour



Figure 11.2.11 Debris Build-up in the Waterway

Local Scour

Local scour occurs around an obstruction that has been placed within a stream, such as a pier or an abutment and can either be clear-water scour or live-bed scour.

Clear-water scour occurs when there is no bed material transport upstream of the bridge. It occurs in streams where the bed material is coarse, the stream grade is flat, or the streambed is covered with vegetation except in the location of substructure members.

Live-bed scour occurs when local scour at the substructure is accompanied by bed material transport in the upstream waterway.

The cause of local scour is the acceleration of streamflow resulting from vortices induced by obstructions (see Figure 11.2.12). Some common obstructions are:

- Abutments – floodplain overbank flow is collected along and forced around abutments at high velocities (see Figure 11.2.13).
- Wide Piers - scour depth is proportional to width (see Figure 11.2.14).
- Long Piers - can produce multiple vortices and greater scour depth if the pier is at an angle to the flow direction (see Figure 11.2.15).
- Unusually Shaped Piers - can increase vortex magnitude. A square-nosed pier will have maximum scour depth, about 20 percent deeper than a sharp-nosed pier and 10 percent deeper than a cylinder or round-nosed pier.
- Bridge Piers Skewed to the Direction of Streamflow - can increase both contraction scour and local scour because of increased (projected) pier width effects. This skew can be dramatically different during low flow versus high flows.
- Depth of Streamflow - increases vortex effect on the streambed. An increase in flow depth can increase scour depth by a factor of 2 or more (see Figure 11.2.16).
- Streamflow Velocity - as streamflow velocity increases vortex action can be magnified considerably.
- Unstable Streambed Material - can contribute to the occurrence of local scour.
- Irregular Waterway Cross Section - can result in local scour at substructure units in the waterway.
- Debris Accumulation - and ice cakes piled up against piers can produce the same effect as a wider pier, increasing both contraction and local scour effects. Debris should be removed as a safety precaution to prevent pier failure

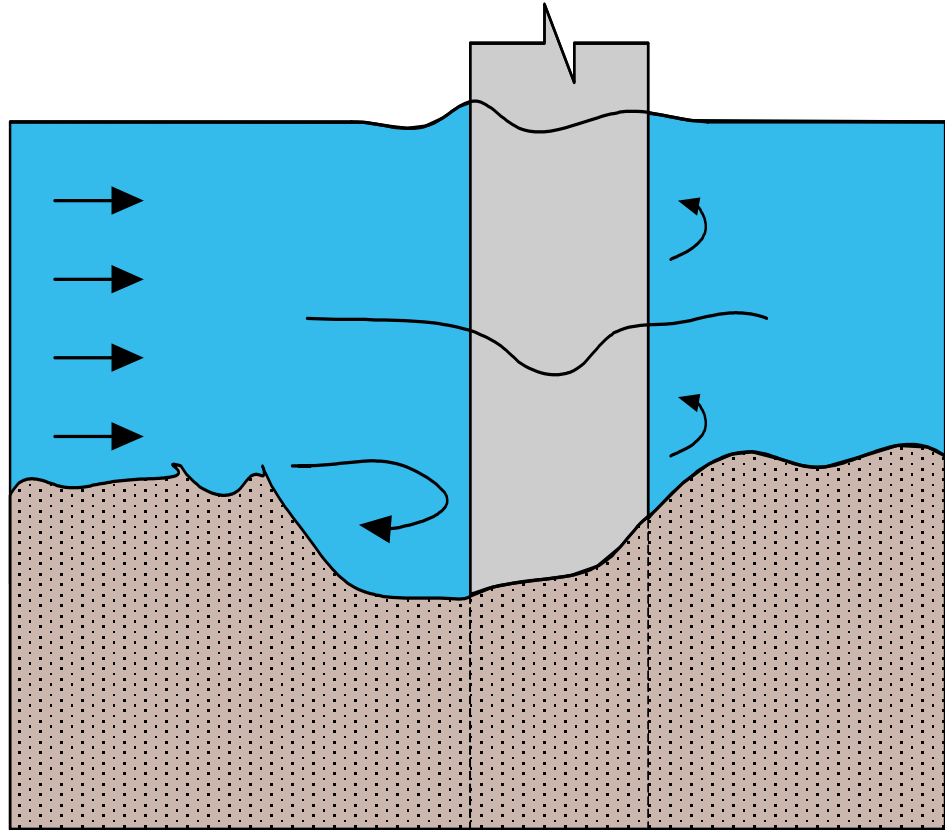


Figure 11.2.12 Local Scour at a Pier



Figure 11.2.13 Local Scour at an Abutment



Figure 11.2.14 Wide Pier



Figure 11.2.15 Long Pier

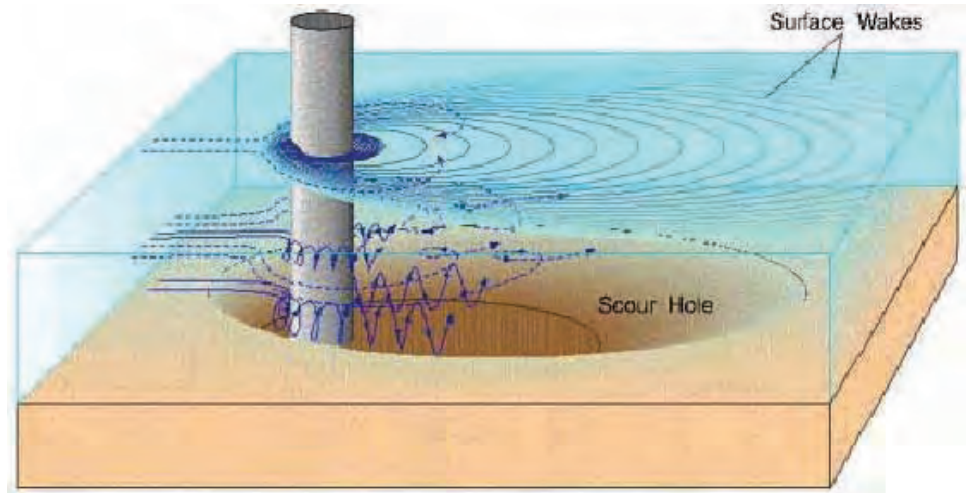


Figure 11.2.16 Local Scour Due to Streamflow Behavior in Deep Water

Scour depths resulting from local scour are larger than those from general scour, often by a factor of ten. However, if there are major changes in hydrologic conditions resulting from such factors as construction of large dams and water resources development, the general scour can be the larger element in the total scour.

Bridges in tidal situations are particularly vulnerable to local scour. A strong tidal current whose direction reverses periodically causes a complex local scour phenomenon around a bridge substructure. This local scour is caused by an imbalance between the input and output sediment transport rates around the pier, and it has a negative influence on the stability of the bridge.

To properly evaluate local scour and impacts of changes in hydrologic and hydraulic conditions on local scour, it is essential to develop and refer to that component of the bridge inspection file which deals with local scour. With each inspection, critical supporting elements of the bridge should be subjected to careful survey to determine the degree of local scour that has developed over time. By referring to this history of change in local scour, it can be determined whether or not the maximum local scour has occurred and the relationship of this maximum local scour to bridge safety.

If the survey of the magnitude of local scour indicates increased local scour with time and furthermore verifies that the local scour exceeds the anticipated maximum local scour when the bridge was designed, remedial measures must be taken to protect the bridge. Surveys of local scour along the abutments and around the piers are most often done during periods of low flow when detailed measurements can be made, either by wading and probing, by probing from a boat, by the use of divers, or by sonic methods. The pattern of survey should be established and remain the same during the life of the bridge, following either a fixed radial or a rectangular grid. Changes in magnitude of local scour can then be compared at specific points over time.

The greatest problem associated with determining the magnitude of local scour relates to maximum local scour occurring at flows near flood peak followed by a period of deposition of sediments in the scour hole after the flood peak has passed

and during low-flow periods. Consequently, a bridge rating should be based upon maximum scour that occurred during floods but not based upon examination of bed levels around abutments and piers during low-flow periods. Hence, it is necessary to use a variety of techniques to differentiate between maximum scour that may have occurred during flood periods and apparent scour after periods of low flow.

The inspector should consider utilizing straight steel or aluminum probing rods to probe loose sediments deposited along abutments and around footings; if sediment is finer than average bed material sizes or if the sediment is easily penetrated by the rod, it is indicative that the present sediment has accumulated in the scour hole and local scour is more severe than indicated by present accumulations of sediments. Core samples may also be used to differentiate between backfill in the scour hole and the bottom of the scour hole. It may be possible to use geotechnical means as another alternative to differentiate between materials that have deposited in the scour hole and the bottom of the scour hole. It may also be necessary to use underwater surveys using divers, or perhaps to even divert water away from critical elements to allow removal of loose backfill material. The inspector can then determine the true level of maximum scour in relationship to the bridge's supporting structural elements.

The problem of accurately determining maximum local scour and rate of change of local scour over time is one of the most difficult aspects of bridge inspection and is one of the most important aspects of evaluating bridge safety. Additional research is being conducted to provide better guidelines for investigating local scour in relationship to bridge safety.

Lateral Stream Migration

Lateral stream migration or horizontal change in the waterway alignment is another type of scour that can also threaten the stability of bridge crossings. Embankment instability typically results from lateral stream movement at a bridge opening and has often been the primary cause in a number of bridge collapses around the country. Bridge abutments are often threatened by this type of scour (see Figure 11.2.17).



Figure 11.2.17 Lateral Stream Migration Endangering a Full Height Abutment

Lateral stream migration is very common and can result from a variety of causes. Channel changes contributing to lateral stream migration include:

- Stream meander changes (see Figure 11.2.18)
- Channel widening or degradation (see Figure 11.2.19)
- Manmade channel changes



Figure 11.2.18 Stream Meander Changes



Figure 11.2.19 Channel Widening

11.2.4

Effects of Waterway Deficiencies

Material Defects

Material defects that can be caused by waterway deficiencies include the deterioration and damage (i.e. abrasion, corrosion, scaling, cracking, spalling, and decay) to channel protection devices and substructure members.

As an integral part of the waterway inspection, careful consideration should be given to the identification of material defects. A loss of quality and quantity of materials required to provide bridge safety may occur in a variety of ways. A careful record of changes in characteristics of materials should be recorded in the bridge inspection file. Changes over time can be compared and any decision concerning maintenance requirements or replacement becomes more straightforward with historic information available.

Bridge Damage

Waterway deficiencies that are severe have the capability to cause damage to bridges. Effects of waterway deficiencies on bridge members include undermining, settlement, and failure.

Undermining

Undermining is the scouring away of streambed and supporting foundation material from beneath the substructure (see Figure 11.2.20). Excessive scour often produces undermining of both piers and abutments. Such undermining is a serious condition, which requires immediate correction to assure the stability of the substructure unit.

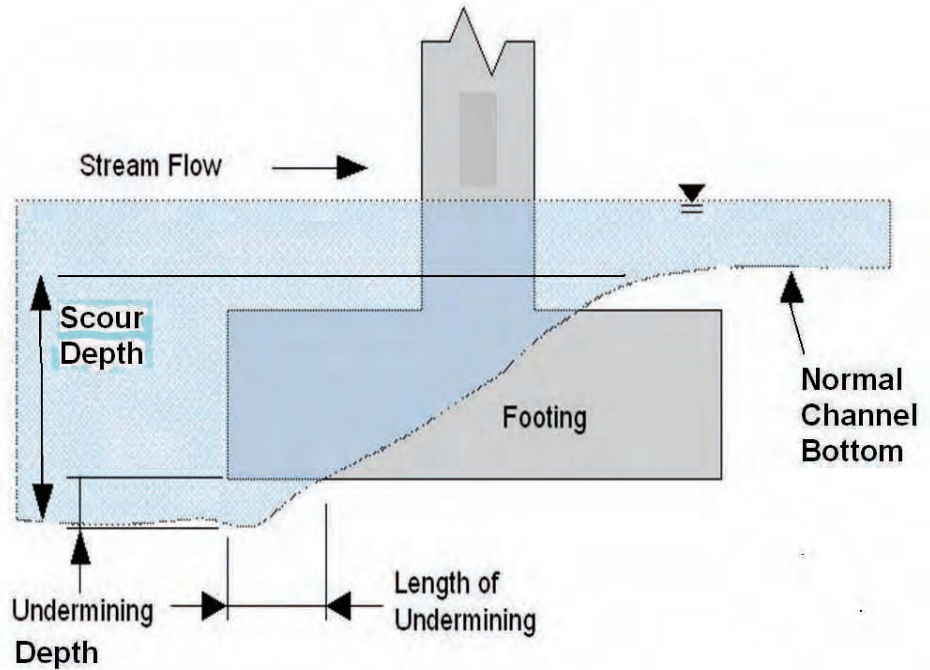


Figure 11.2.20 Scour and Undermining

The undermining of structural elements is basically an advanced form of scour. It is essential to determine whether or not undermining has a potential to develop, as well as whether it has already occurred. Undermining can pose an immediate threat to safety and must be addressed immediately.

With small bridges, L-shaped rods can be used to probe at the base of footings to determine possible undermining. On the other hand, undermining may be very difficult to identify due to the redeposition of sediments during periods of low flow after undermining has occurred. However, in those channels where the bed is formed of coarse rock and the sediment supply to the bridge crossing is small, it is possible to inspect the footings because the backfill with fine sediments during periods of low flow generally does not occur.

For areas not accessible to effective probing from above water, it is essential to employ underwater inspection techniques utilizing divers. Whenever possible, the inspector should take detailed measurements, showing the height, width, and penetration depth of the undermined cavities. Refer to Topic 11.3 for a more detailed description of underwater inspections.

Settlement

Local scour and undermining is typically most severe at the upstream end of the substructure and, if not corrected, may result in differential settlement (see Figure 11.2.21).

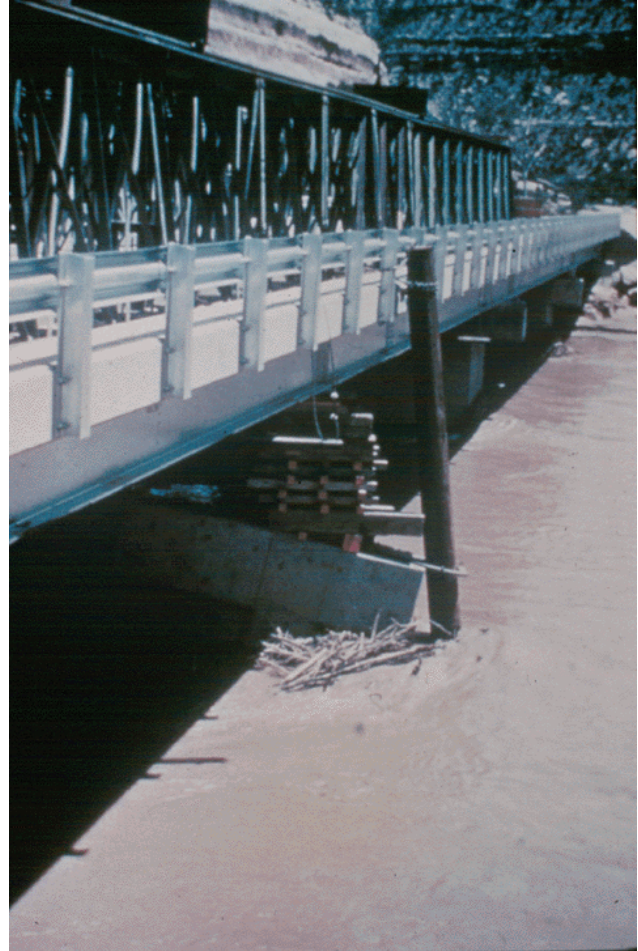


Figure 11.2.21 Pier Settlement due to Undermining

Failure

When undermining and settlement go undetected for some length of time, the bridge may become unstable, and be subject to failure or collapse. Failure may occur over a period of time, or it may be a very rapid process occurring during a flood event.

11.2.5

Inspection Preparation

It is necessary to identify and assemble the documentation and equipment required to conduct the waterway inspection. The required equipment will depend upon the characteristics of the river, the characteristics of the bridge, and the accessibility of the site.

Information Required

Necessary information is required for a comprehensive, well-organized inspection of waterways.

Examine any previous hydraulic engineering scour evaluation studies on the bridge. These studies provide theoretical ultimate scour depths for the bridge substructure elements. Review original drawings and previous inspection report data taken from successive inspections to determine the foundation type and streambed material. Establish whether the waterway is stable, degrading or aggrading.

Become familiar with site conditions and channel protection installations. Verify if there is a change in the hydraulic opening by reviewing previous channel cross sections and profiles. Examine the photographs to determine any changes in the channel alignment.

Considering the complexity of the inspection and the equipment and materials needed to execute the inspection, the inspector should develop a detailed plan of investigation, as well as forms for recording observations. A systematic procedure should be used each time the bridge is surveyed to provide a means of accurately identifying changes that have occurred at the bridge site, which may affect the safety of the bridge.

Inspection Requirements Prior to beginning the inspection, the bridge inspector should understand the type and extent of the inspection required. Waterway inspections are typically accomplished by either surface inspection or underwater diving inspection.

Surface or “wading” inspection is conducted on shallow depth foundations. Submerged substructure, streambed and embankments are often accessible by inspectors using hip boots or chest waders and probing rods (see Figure 11.2.22). Additionally, boats are often used as a surface platform from which to gather waterway data, including channel cross-sections, pier soundings, etc.

Underwater diving inspection is required when the foundations are deep into water. Site conditions often require waterway and submerged substructure units to be evaluated using divers, in order to obtain complete, accurate data. This is especially true when water depths are too great for wading inspection, and/or undermining of substructure elements is suspected.

Equipment

Equipment required to inspect bridges is listed and described in Topic 3.4. Additional equipment may be required for the inspection of waterways. The type of equipment needed for a waterway inspection is dependent on the type of inspection. The following is a list that represents the most common waterway inspection equipment.

- Probing rods and waders (see Figure 11.2.22)
- Sounding line (lead line to measure depths of scour)
- Fathometer to determine water depth
- Diving equipment (see Figure 11.2.23 and Topic 11.3)
- Boat, oars, motor, and anchor
- Surveying equipment (level or transit)
- Survey tapes and chains
- Level rod
- Compass
- Underwater camera and video recorder
- Underwater to surface communication equipment
- Past climatic and hydrologic records
- Stopwatch to time stream velocity and record diver durations under water



Figure 11.2.22 Probing Rod and Waders



Figure 11.2.23 Surface Supplied Air Diving Equipment

Special Considerations

Special considerations should be given to the site conditions and the navigational controls that may adversely affect the safety of the bridge inspector and others.

Site conditions such as rapid stream flow velocity, pollution levels, safety concerns, and conditions requiring special attention need to be accounted for during a waterway inspection (see Figure 11.2.24).

Navigational control is necessary when inspecting large waterways. The Coast Guard should be notified in advance of inspections where navigational controls are needed. Other navigational controls include boat traffic, operational status and condition of dolphins and fenders, dam releases (see Figure 11.2.25).



Figure 11.2.24 Rapid Flow Velocity



Figure 11.2.25 Navigable Waterway

11.2.6

Inspection Procedures and Locations

Inspection procedures include:

- Visual
- Probing
- Measure/Document

Visual

The primary method used to inspect waterways is visual. The inspector must look at the site in the vicinity of the bridge. The inspector also needs to look at the flood plain. This observation may have to be done during periods of high water flow.

Probing

After the inspector gets the general condition by visually inspecting the bridge site, the next step is to probe for any scour or undermining. Care should be taken to adequately press the probing rod into the soil in the streambed. Sometimes scour holes are loosely filled with silt. This silt may be washed away quickly during the next period of high stream flow velocity, permitting additional scour.

Measure/Document

Measurements to obtain the cross section and profile must be taken. These measurements are used to analyze the area of the hydraulic opening and help determine need for and design of mitigation measures. The cross section under the bridge can be measured with a surveyor's tape or rod. The stream profile can be measured with a hand level, survey tape and surveying rod (see Figures 11.2.26 and 11.2.27). The streambed profile and hydraulic opening should be compared to previous inspections.

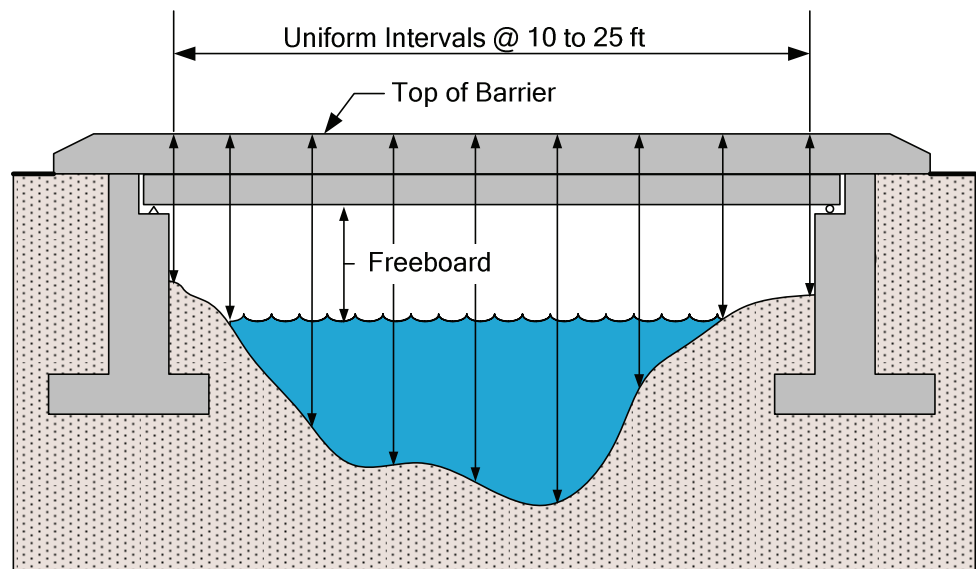


Figure 11.2.26 Streambed Cross-Section

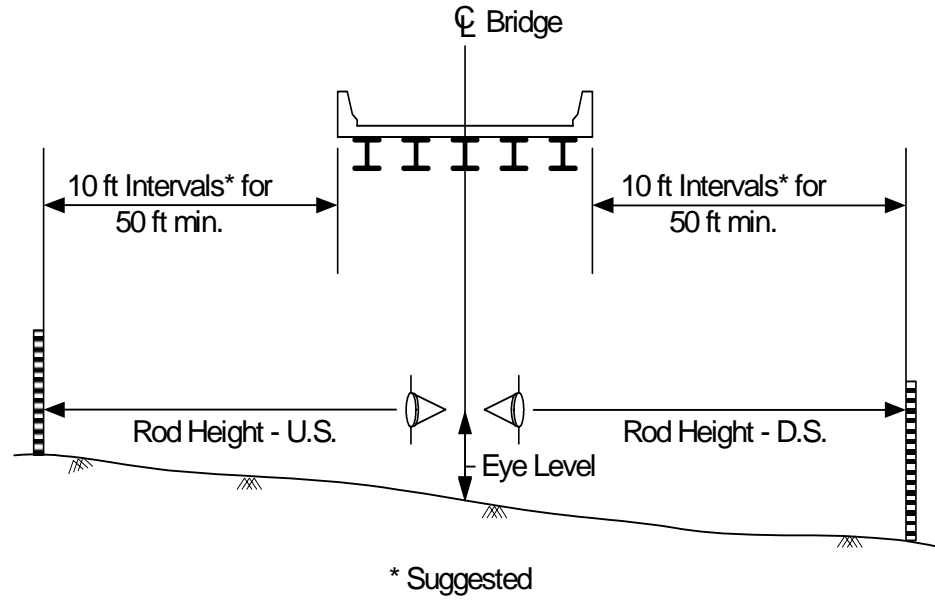


Figure 11.2.27 Streambed Profile

When inspecting the bridge waterway, three main areas are of concern. These areas include the channel under the bridge, the upstream channel, and the downstream channel.

Channel Under the Bridge

Substructure

- Inspect substructure units below water level for defects, damage and foundation condition (see Figure 11.2.28).
- Measure heights and lengths of foundation element exposures, and dimensions of foundation undermining (opening height, width, and penetration depth), as applicable. Document with sketches and photos.
- Note location of high water mark on abutments and piers.
- Plumb face of abutments and piers for local settlement (see Figure 11.2.29).
- Check abutments and piers for accumulations of debris (drift).
- In case of damage to scour countermeasures, check condition and function of channel protection devices adjacent to substructure units.
- In case of changes in streambed elevations generate streambed profile.
- In case of changes in streambed cross section generate streambed cross-sections for typical upstream, downstream, and under structure waterway configurations.
- Locate and contour large scour holes at the substructure.
- Establish a grid system for depth soundings at substructure elements, which can be repeated in subsequent inspections.
- Take photographs to document conditions of abutments, piers, and channel features.
- Check bridge seats and bearings for transverse movement.



Figure 11.2.28 Pile Bent Deterioration Normally Hidden Underwater

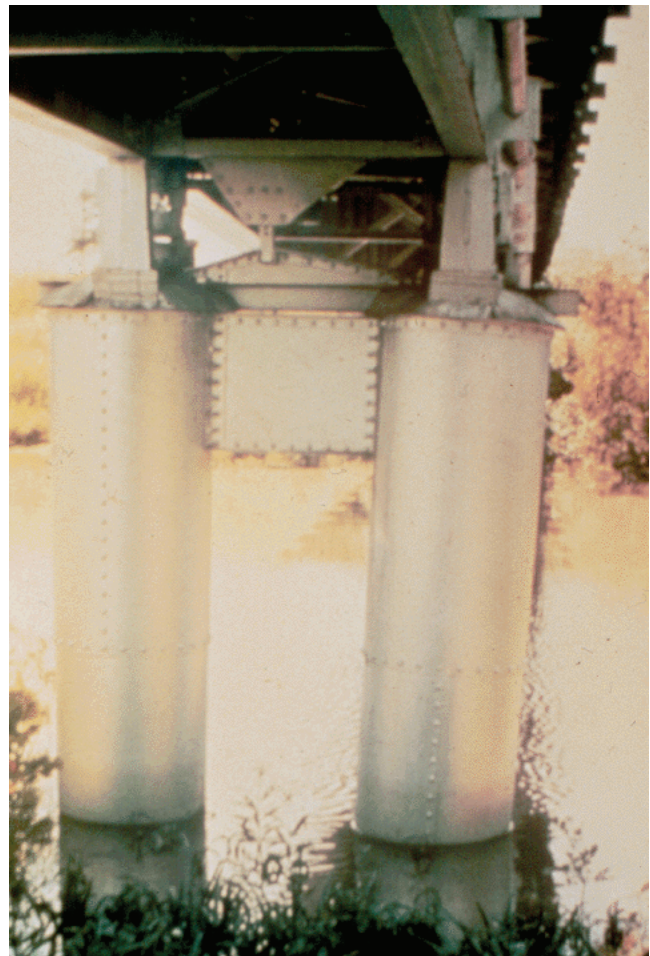


Figure 11.2.29 Out of Plumb Pier Column

Superstructure

During a waterway inspection, the superstructure can be a good indicator of existing waterway deficiencies.

The following items should be reviewed:

- Check to see if the superstructure is tied to the substructure to prevent washout.
- Sight along the superstructure to reveal irregularity in grade or horizontal alignment caused by settlement (see Figure 11.2.30).
- Check to see if debris is lodged in superstructure elements or tree limbs above the superstructure (see Figure 11.2.31).
- Check for high watermarks or ice scars on trees.
- Talk to local residents about high water during previous flood events.
- Check any hydraulic engineering scour evaluation studies for overtopping flow elevation and frequency.
- Check to see if the superstructure is in the floodplain.
- Check to see if the superstructure presents a large surface of resistance during floods.
- Note if the superstructure is vulnerable to collapse in the event of excessive foundation movement (i.e., simple span and non-redundant vs. continuous) (see Figure 11.2.32).



Figure 11.2.30 Superstructure Misalignment



Figure 11.2.31 Drift Lodged in a Superstructure



Figure 11.2.32 Typical Simple Multi-Span Bridge

Channel Protection and Scour Countermeasures

- Examine any river training and bank protection devices to determine their stability and condition.
- Check for any gaps or spreading that have occurred in the protective devices.
- Check for separation of slope pavement joints.
- Check for exposure of underlying erodible material.
- Inspect for steepening of the protective material and the surface upon

which these materials are placed.

- Check for evidence of slippage of protective works.
- Check the condition and function of riprap as well as changes in size of riprap.
- Check for evidence of failed riprap in the stream (see Figure 11.2.33).
- Check for the proper placement, condition, and function of guidebanks, or spurs.
- Check the streambed in the vicinity of the channel protection for evidence of scour under the device.
- Check to see if the streamflow is impinging behind the protective devices.



Figure 11.2.33 Failed Riprap

It is essential to identify any change that is observable, including changes in the gradation of riprap. It is also essential to carefully inspect the integrity of the wire basket where gabions have been used.

Disturbance or loss of embankment and embankment protection material is usually obvious from close scrutiny of the embankment. Unevenness of the surface protection is often an indicator of the loss of embankment material from beneath the protective works. However, loss of embankment material may not be obvious in the early stages of failure. The inspector should also look for irregularities in the embankment slope.

It is even more difficult to determine conditions of the protective works beneath the water surface. In shallow water, evidence of failure or partial failure of protective works can usually be observed. However, with deeper flows and sediment-laden flows, it will be necessary for the inspector to probe or sound for physical evidence to identify whether failure or partial failure exists.

Waterway Area

- Check the hydraulic opening with respect to the floodplain.
- Determine the streambed material.
- Check for degradation (see Figure 11.2.34).
- Check for local scour around piers and abutments and record data.
- Inspect during drought conditions when applicable.
- Check for contraction scour due to abutment placement, sediment build-up, and vegetation.
- Check for debris underwater, which may constrict flow or create local scour conditions.
- Check to see if the approach roadways are in the floodplain (see Figure 11.2.35).
- Examine approaches for signs of overtopping.
- Determine if the hydraulic opening is causing or has the potential to cause scour under the bridge.



Figure 11.2.34 Severe Streambed Degradation Evident at Low Water



Figure 11.2.35 Approach Roadway Built in the Floodplain

**Upstream and
Downstream Channel**

Banks

- Stable - gradually sloped, grass covered with small trees. Banks are still basically in their original locations. Slope stabilization measures are in place and intact (see Figure 11.2.36).
- Unstable - bank is sloughing due to scour, evidence of lateral movement or erosion, damage to slope stabilization measures (see Figure 11.2.37).



Figure 11.2.36 Stable Banks



Figure 11.2.37 Unstable, Sloughing Banks

Main Channel

- Record the flow conditions (e.g. low or high).
- Estimate velocities using floats.
- Check for sediment buildup and debris, which may alter the direction of stream flow (see Figure 11.2.38 and 11.2.42).
- Check for cattle guards and fences, which may collect debris. The results may be sediment buildup, channel redirection, or an increase in velocity and contraction scour (see Figure 11.2.39).
- Determine the streambed material type.
- Check for aggradation or degradation. Check several hundred feet upstream and downstream of the bridge.
- Check the basic alignment of the waterway with respect to the structure and compare it to its original alignment (lateral stream migration) (see Figure 11.2.40).
- Record the direction and distribution of flow between piers and abutments.
- Make sketches and take pictures as necessary to document stream alignment, conditions of bank protection works, and anything that appears unusual at each inspection.



Figure 11.2.38 Sediment Accumulation Redirecting Streamflow



Figure 11.2.39 Fence in Stream at Bridge

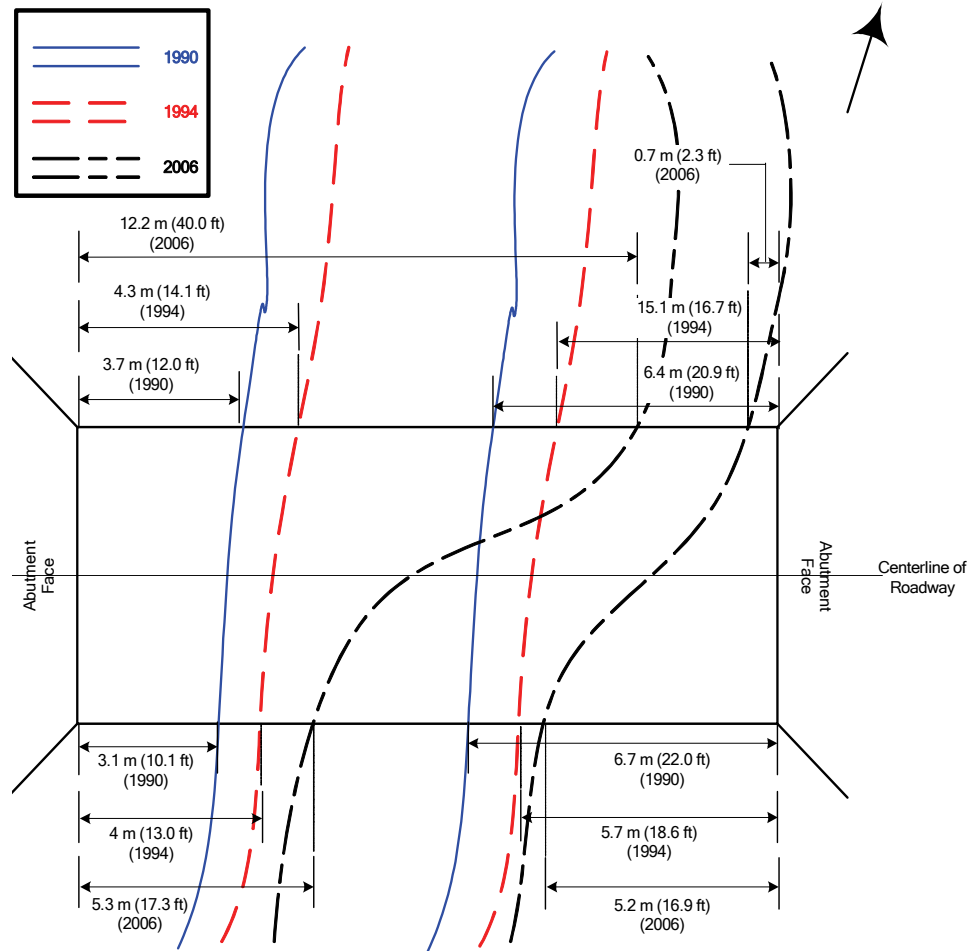


Figure 11.2.40 Waterway Alignment 1990 - 2006

Floodplain

- Check for evidence of embankment sloughing, undermining, and lateral embankment movement resulting from significant stream flow.
- Check for amounts and locations of debris, sediment accumulations, tree scaring, and amounts of vegetation growth, all of which may indicate the frequency of stream flow on the floodplain.
- Check for accumulations of sediments, debris, or significant vegetation growth in the waterway that may impact sufficient waterway adequacy and adversely affect streamflow under the main channel span (see Figure 11.2.41).
- Check for damage to the approach pavement, shoulders, and embankments to determine if the stream flow overtops the approach roadway during flood flows or returns to the main channel to flow under the structure.
- Check the extent of structures, trees, and other obstructions that could impact stream flow and adversely affect the bridge site (see Figure 11.2.42).

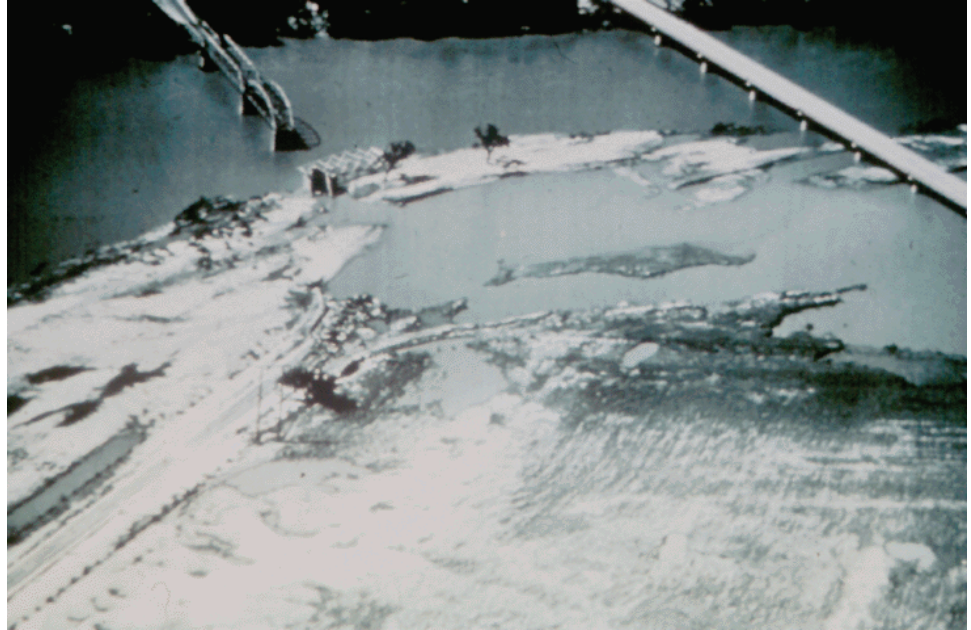


Figure 11.2.41 Approach Spans in the Floodplain

Other Features

- Check for streamflow impact of any other features such as tributaries, confluence of another waterway, dams, and substructure units from other bridges (see Figure 11.2.43). This may create conditions for high stream flow velocity through the bridge.
- Report any recent construction activity (e.g. causeways, fishing piers, and stranded vessels) which may affect stream flow under the bridge.



Figure 11.2.42 Debris and Sediment in the Downstream Channel



Figure 11.2.43 Upstream Dam

11.2.7

Evaluation

Scour Potential Assessment

Bridges over streams and rivers are subject to scour and should be evaluated to determine their vulnerability to floods and to determine whether they are scour critical.

Purpose and Objective

In a scour evaluation, structural, hydraulic and geotechnical engineers have to make decisions on:

- Priorities for making bridge scour evaluations.
- The scope of the scour evaluations to be performed in the office and in the field.
- Whether a bridge is a scour critical bridge.
- A plan of action should be developed for each scour critical bridge.
- Which scour countermeasures may reduce the bridge's vulnerability to scour.
- Which scour countermeasures are most suitable and cost-effective for a given bridge site.
- Priorities for installing scour countermeasures.
- Monitoring and inspecting scour critical bridges.

A responsibility of the bridge inspector is to gather on-site for a scour potential assessment that:

- Accurately records the present condition of the bridge and the stream (see Figure 11.2.44).
- Identifies conditions that are indicative of potential problems with scour and stream stability.

To accomplish these objectives, the inspector needs to recognize and understand the potential for scour and its relationship with the bridge and stream. When an actual or potential scour problem is identified by a bridge inspector, the bridge should be further evaluated by an interdisciplinary team made up of structural, geotechnical, and hydraulic engineers.



Figure 11.2.44 Scour at a Pile Abutment

Recognition of Scour Potential

The inspector must identify and record waterway conditions at the bridge, upstream of the bridge, and downstream of the bridge. Indications that could establish a scour potential include waterway, substructure and superstructure.

Waterway

- Stream flow velocity is a major factor in the rate of scour. High velocities produce accelerated scour rates (see Figures 11.2.45 and 11.2.46).
- Streambed materials such as loose cohesive soils, sand or gravel material, are highly susceptible to accelerated scour rates (see Figure 11.2.46).
- Orientation of waterway opening such as misaligned or skewed structure foundation elements, which can frequently generate adverse streamflow conditions, can lead to scouring of the streambed especially during flood flows (see Figure 11.2.47).
- Large floodplains constricted to a narrow hydraulic opening under a

structure can result in accelerated scour during flood flow, due to high velocities and changes in local flow direction (see Figure 11.2.48).

- Banks that are sloughing, undermined, or moving laterally are signs of potential scour at a bridge (see Figure 11.2.49).



Figure 11.2.45 Fast Flowing Stream

Scour Rate vs Velocity for Streambed Material

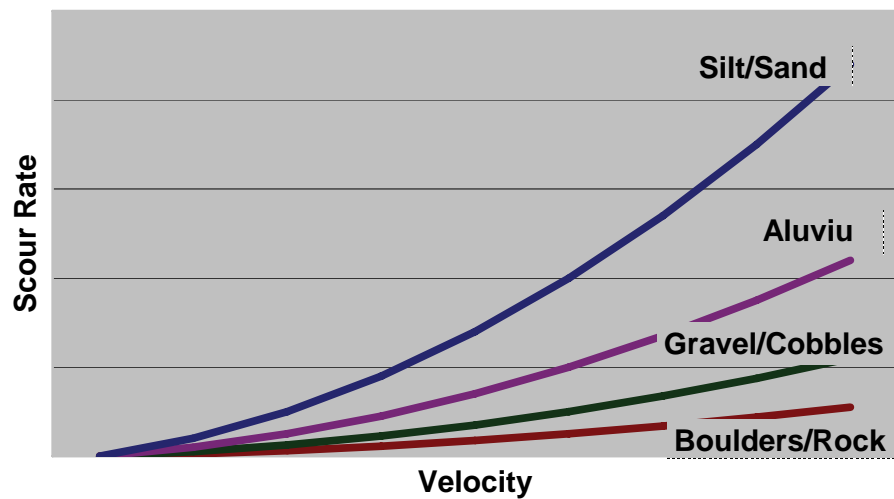


Figure 11.2.46 Scour Rates vs. Velocity for Common Streambed Materials



Figure 11.2.47 Typical Misaligned Waterway



Figure 11.2.48 Typical Large Floodplain



Figure 11.2.49 Lateral Stream Migration

Substructure

The following condition of bridge foundations and substructure units should be considered in the inspector's scour potential assessment:

- Piers and abutments that are not parallel with the stream flow especially during flood flow conditions, can lead to local scour of foundations (see Figure 11.2.50).
- Rotational, horizontal, or vertical movement of piers and abutments are evidence of undermining (see Figure 11.2.51).
- Spread footing foundation levels above maximum calculated scour depth determined for a particular streambed material are subject to undermining and failure. Exposed piling can be damaged or deteriorated and can lead to failure. Loss of supporting surrounding soil can also diminish pile capacity (see Figure 11.2.52).
- Restriction of the general waterway opening beneath the structure due to numerous large piers or simply an inadequate span length between abutments can increase streamflow velocities and lead to contraction scour (see Figure 11.2.53).



Figure 11.2.50 Stream Alignment Not Parallel with Abutments

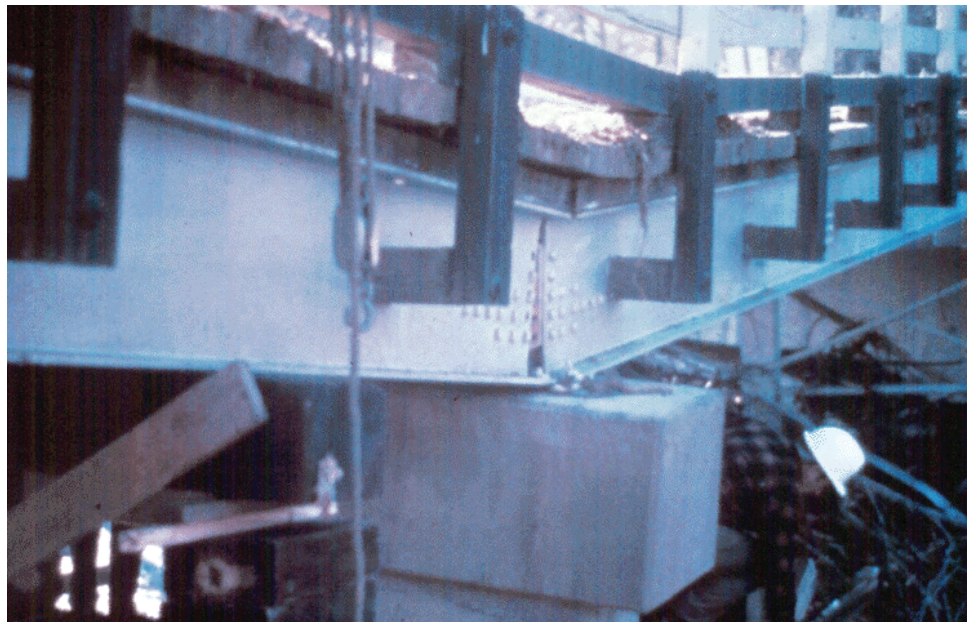


Figure 11.2.51 Rotational Movement and Failure Due to Undermining



Figure 11.2.52 Exposed Piling Due to Scour



Figure 11.2.53 Accelerated Flow Due to Restricted Waterway

Superstructure

The following conditions associated with the superstructure should be considered in recognizing scour potential:

- Evidence of overtopping indicates insufficient hydraulic opening and excessive flow velocities.
- Insufficient freeboard can trap debris, increasing the potential for a washout.
- Simple span designs are most susceptible to collapse in the event of

foundation movement or increased flows during a flood event.

NBI Rating Guidelines Scour Evaluation

The factors to be considered in a scour evaluation require a broader scope of study and effort than those considered in a bridge inspection. The scour evaluation is an engineering assessment of existing and potential problems and making a sound judgement on what steps can be taken to eliminate or minimize future damage.

In assessing the adequacy of the bridge to resist scour, the inspector and engineer need to understand and recognize the interrelationships between several items. The inspector can expedite the engineers' evaluation by considering the following:

- Substructure Condition Rating (Item 60)
- Channel and Channel Protection Condition Rating (Item 61)
- Waterway Adequacy Appraisal Rating (Item 71)
- Scour Critical Bridges (Item 113)

See Topic 4.2 for a detailed description of NBI Rating Guidelines.

Substructure (Item 60)

Substructure rating is a key item for rating the bridge foundations for vulnerability to scour damage. When a bridge inspector finds that a scour problem has already occurred, it should be considered in the condition rating of the substructure. If the bridge is determined to be scour critical, the condition rating for Item 60 should be further evaluated to ensure that any existing problems have been properly considered. The rating factor given to Item 60 should be consistent with the one given to Item 113 whenever a rating factor of 2 or below is determined for Item 113.

Channel and Channel Protection (Item 61)

This item permits rating the physical channel condition affecting streamflow through the bridge waterway. The condition of the channel, adjacent rip-rap, bank protection, guidebanks, and evidence of erosion, channel movement or scour should all be considered in establishing the rating for Item 61.

Waterway Adequacy (Item 71)

This is an appraisal item, rather than a condition item, and permits assessment of the adequacy of the bridge waterway opening to pass flood flows.

Scour Critical Bridges (Item 113)

This item permits a rating of current bridge conditions regarding its vulnerability to flood damage. A scour-critical bridge is one with abutment or pier foundations that are considered unstable due to:

- Observed scour at the bridge site, or
- Having scour potential as determined by a scour evaluation

When an actual or potential scour problem is identified by a bridge inspector, the bridge should be further evaluated by an interdisciplinary team comprised of structural, hydraulic and geotechnical engineers.

In this process, the effects of a 100-year flood (a flood which has a one percent chance of occurring in any year) would be considered, but the effects of a "superflood" or 500-year flood would also be assessed and assigned to one of three conditions.

- Safe condition - if calculations indicate that the likely scour depth of the superflood would be above the top of the footing, the bridge would be considered safe or stable (see Figure 11.2.54).
- Evaluate condition - if calculations indicate a scour depth within the limits of a spread footing or piles, further structural or foundation evaluation may be needed to establish the likely stability of the foundation (see Figure 11.2.55).
- Fix condition - where there are indications that scour depth will lie below the bottom of the spread footing or piles, then the bridge would be considered clearly scour critical and would be at risk to damage or collapse (see Figure 11.2.56).

Scour Assessment

Safe

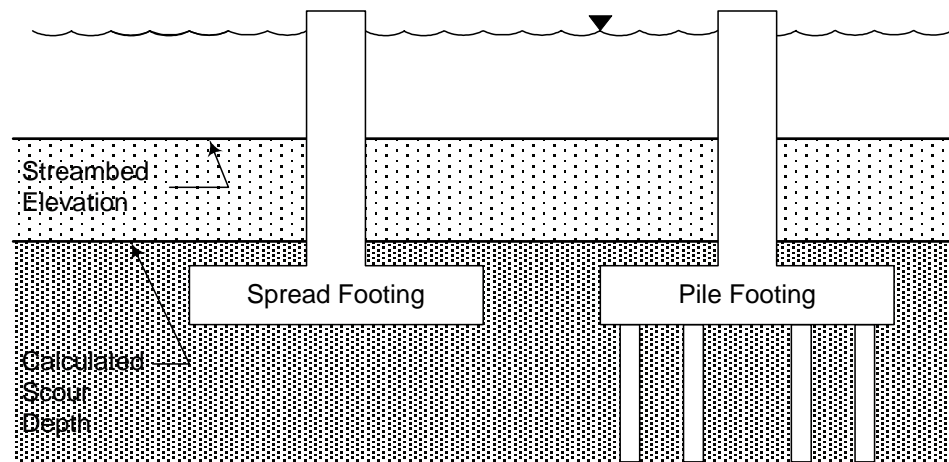


Figure 11.2.54 Scour Assessment - Safe

Scour Assessment Evaluate

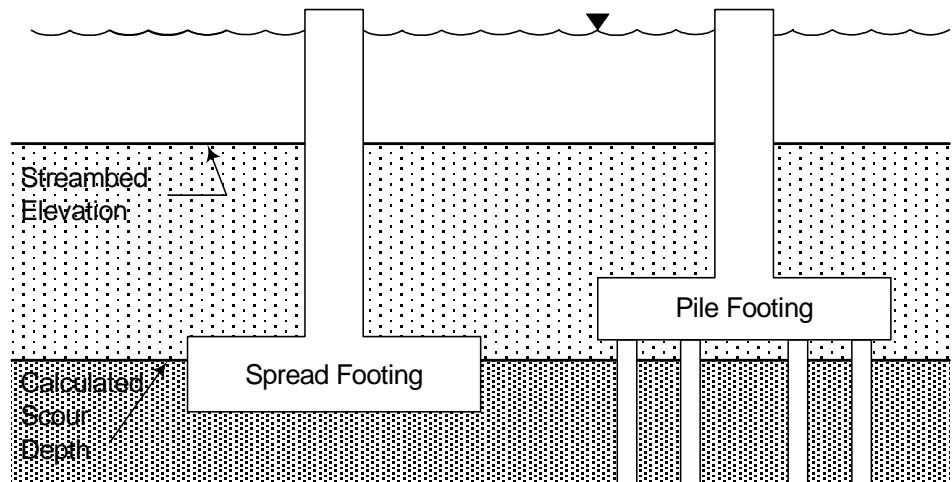


Figure 11.2.55 Scour Assessment - Evaluate

Scour Assessment Fix

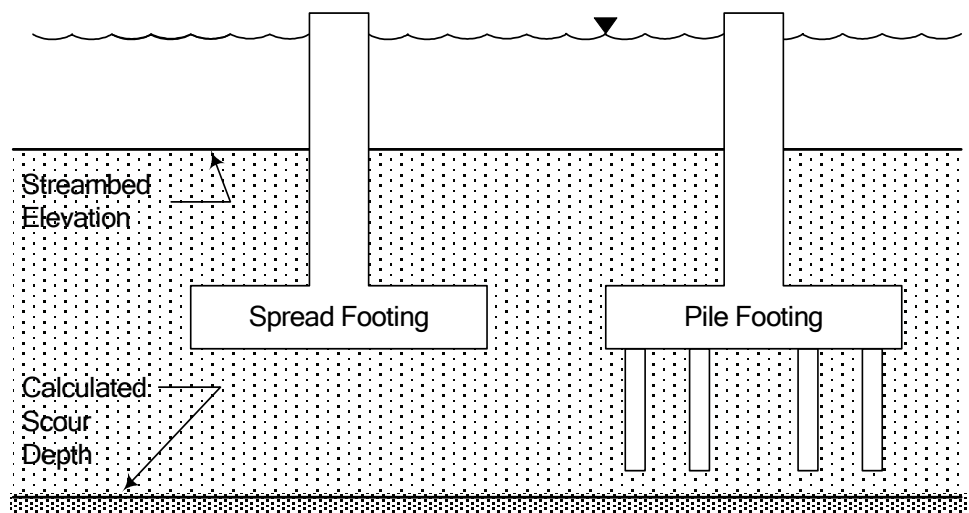


Figure 11.2.56 Scour Assessment - Fix

For scour critical bridges, the NBIS requires that a Plan of Action must be developed for monitoring and correcting the scour problem. Bridges which are scour critical must then be monitored in accordance with the plan. Such a plan would address the type and frequency of future inspections to be made and would include a schedule of timely design and construction actions for appropriate countermeasures to protect the bridge. The countermeasures might include the

possibility of riprap, bed armoring, or flow-control structures or embankments.

Washouts of scour critical bridges, which appeared to be stable in the past, have still occurred, however, and probably will occur again in the future.

11.2.8

Culvert Waterway

The following excerpt is from a reproduction of the out-of-print Culvert Inspection Manual (Supplement to Manual 70), July 1986 – Chapter 5, Section 3:

Section 3. WATERWAYS

5-3.0 General.

The primary function of most culverts is to carry surface water or traffic from one side of a roadway embankment to the other side. The hydraulic design of culverts usually involves the determination of the most economical size and shape of culvert necessary to carry the design discharge without exceeding the headwater depth allowable. It is essential that the culvert be able to handle the design discharge. If the culvert is blocked with debris or the stream changes course near the ends of the culvert, the culvert may be inadequate to handle design flows. This may result in excessive ponding, flooding of nearby properties, and washouts of the roadway and embankment. In addition changes in upstream land use such as clearing, deforestation, and real estate development may change the peak flow rates and stream stability. It is therefore important to inspect the condition of the stream channel, SI&A item 61, and evaluate the ability of the culvert to handle peak flows, SI&A item 71.

5-3.1 Stream Channel--What to Look for During Inspection.

The stream channel should be inspected to determine whether conditions exist that would cause damage to the culvert or surrounding properties. Factors to be checked include culvert location (horizontal and vertical alignment), scour, and accumulation of sediment and debris. These factors are closely related to each other. Poor culvert location can result in reduced hydraulic efficiency, increased erosion and sedimentation of the stream channel, and increased damage to the embankment and surrounding properties. A brief discussion of each of these factors is provided.

- a. Horizontal Alignment - The inspector should check the condition of the stream banks and any bank protection at both ends of the culvert. He should also check for erosion and indications of changes in the direction of the stream channel. Sketches and photographs should be used to document the condition and alignment at the time of inspection. Abrupt stream alignment changes retard flow and may require a larger culvert; they cause increased erosion along the outside of the curve, damage to the culvert, and increased sedimentation along the inside of the curve. Where sharp channel curves exist at either the entrance or exit of a culvert, the inspector should check for sedimentation and erosion.
- b. Vertical Alignment - Vertical alignment problems are usually indicated by scour or accumulation of sediment. Culverts on

grades that differ significantly from the natural gradient may present problems. Culverts on flat grades may have problems with sediment build up at the entrance or within the barrel. Culverts on moderate and steep grades generally have higher flow velocities than the natural stream and may have problems with outlet scour. Scour and sediment problems may also occur if the culvert barrel is higher or lower than the streambed.

c. Scour - Erosion generally refers to loss of bank material and a lateral movement of the channel. Scour is more related to a lowering of the streambed due to the removal and transporting of stream bed material by flowing water. Scour may be classified into two types: local scour and general scour.

(1) Local scour is located at and usually caused by a specific flow obstruction or object, which causes a constriction of the flow. Local scour occurs primarily at the culvert outlet.

(2) General scour extends farther along the stream and is not localized around a particular obstruction. General scour can involve a gradual, fairly uniform degradation or lowering of the stream channel. It can also result in abrupt drops in the channel that move upstream during peak flows. This type of scour is referred to as head cutting. Head cutting may be a serious problem if it is occurring in the channel downstream from the culvert, since it may threaten the culvert as it moves upstream. Head cutting may also occur in the stream channel immediately upstream from depressed inlets. Where upstream head cutting is usually not as serious a problem for the culvert, it can affect upstream structures and properties.

The upstream channel should be checked for scour that may undermine the culvert or erode the embankment. Scour that is undermining trees or producing sediment that could block or reduce the culvert opening should also be noted. The stream channel below the culvert should be checked for local scour caused by the culvert's discharge and for general scour that could eventually threaten the culvert.

d. Accumulation of Sediment and Debris - Deposits of debris or sediment that could block the culvert or cause local scour in the stream channel should be noted. Accumulations of debris or sediment in the stream may cause scour of the streambanks and roadway embankment, or could cause changes in the channel alignment. Debris and sediment accumulations at the culvert inlets or within the culvert barrel reduce the culvert's capacity and may result in excessive ponding. It also increases the chances for damage due to buoyant forces. Downstream obstructions, which cause water to pond at the culvert's outlet, may also reduce the culvert's capacity. Debris collectors are used in some culverts so that the opening is not blocked by floating materials.

5-3.2 Waterway Adequacy - What to Look for During Inspection.

The preceding paragraphs dealt with evaluating the condition of the stream channel and identifying conditions that could cause damage to the culvert or reduce the hydraulic efficiency of the culvert. A closely related condition that must be evaluated is the waterway adequacy or ability of the culvert to handle peak flows, changes in the watershed, and changes in the stream channel which might affect the hydraulic performance. Guidelines for rating SI&A item 71, Waterway Adequacy, are presented in the Coding Guide.

- a. High Water Marks - The high water elevation will vary with each flood but should still be checked to evaluate waterway adequacy. Ideally, culverts should be checked during or immediately after peak flows to determine whether water is being ponded to excessive depths, flooding adjoining properties, or overflowing the roadway, as shown in Exhibit 63. High water marks are needed to define the upstream pond elevation and the downstream tailwater elevation. Several high water marks should be obtained, if possible, to insure consistency. High water marks in the culvert barrel, in the drain down area near the inlet, or near turbulent areas at the outlet are generally misleading. An inspection can also determine high water levels for peak flows by looking for debris caught on fences, lodged in trees, or deposited on the embankment. Information may also be obtained by interviewing area residents. Indications of excessive ponding, flooding, or overtopping of the roadway should be investigated to determine the cause. If the cause is apparent, such as a blocked inlet, it should be reported for scheduling of appropriate maintenance. If the cause is not apparent, the culvert should be reported for evaluation by a hydraulic specialist.
- b. Drainage Area - The inspector should be aware that changes in the drainage might have an effect on the discharge that culverts must handle. Replacement of an upstream culvert with a larger structure may eliminate upstream ponding, causing more water to reach the culvert sooner. Land clearing, construction, channel improvements, or removal of upstream dams or sediment basins may also affect discharge rates. Similarly, changes in land use may increase or decrease the amount of rainfall that infiltrates the ground and the amount that runs off. The inspector should note in the inspection report any apparent changes that are observed and be aware that changes a considerable distance upstream may affect the performance of downstream structures. Obstructions downstream from a culvert that back water up to the culvert may also affect the performance of the culvert.
- c. Scour - As previously discussed, scour that changes the stream alignment at the ends of the culvert can reduce the hydraulic efficiency.

- d. Sedimentation and Debris - Accumulation of debris and sediment at the inlet or within the culvert barrel reduces both the size of the opening and the culvert's capability to handle peak flows. Severe drift and sediment accumulations are illustrated in Exhibits 64 and 65. However, culverts are occasionally designed with fill in the bottom to create a more natural streambed for fish.



Figure 11.2.57 (Exhibit 63) Culvert Failure Due to Overtopping



Figure 11.2.58 (Exhibit 64) Culvert Almost Completely Blocked by Sediment Accumulation

SECTION 11: Inspection and Evaluation of Waterways
TOPIC 11.2: Inspection of Waterways

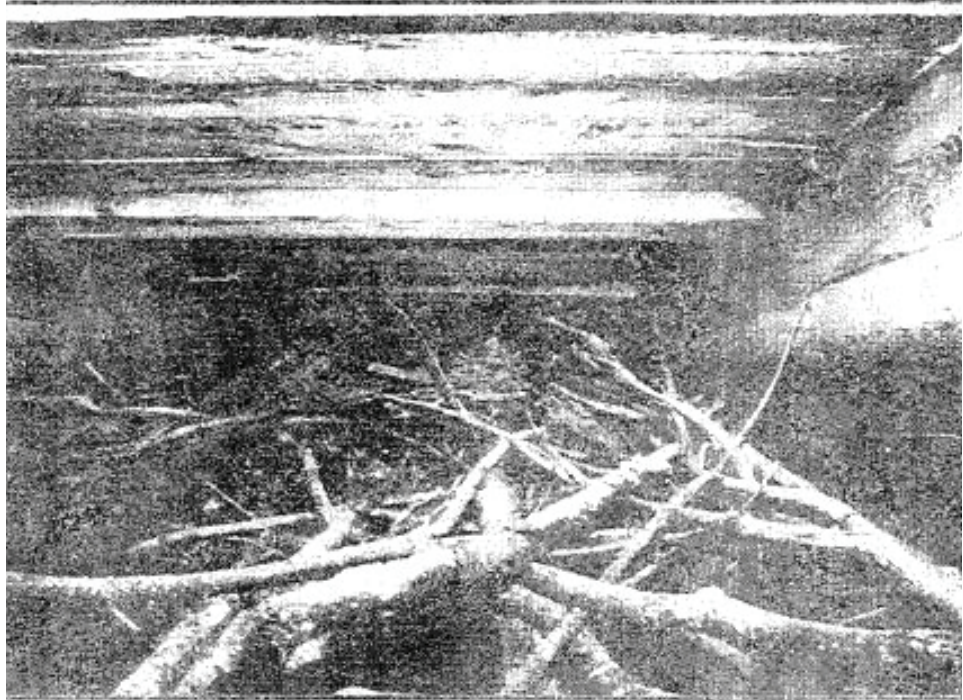


Figure 11.2.59 (Exhibit 65) Drift and Debris Inside Timber Box Culvert